


INJECTION DETAILS:

- MARK AND DRILL INJECTION PORT HOLES
- HOLES SHOULD BE DRILLED AT 45 DEGREE ANGLES TO INTERSECT CRACK AT IT'S CENTER
- BY DRILLING PORTS AT A 45 DEGREE ANGLE THE RESIN IS ALLOWED TO BE INJECTED IN THE MIDDLE OF THE CRACK AND EXPAND OUTWARDS
- SUITABLE INJECTION GROUTS WOULD BE:
 - ADCOS PURINJECT® 1C STOP
 - ADCOS PURINJECT® 1C DUO
 - ADCOS PURINJECT® 1C FLEX
 - ADCOS PURINJECT® 1C FLEX 55

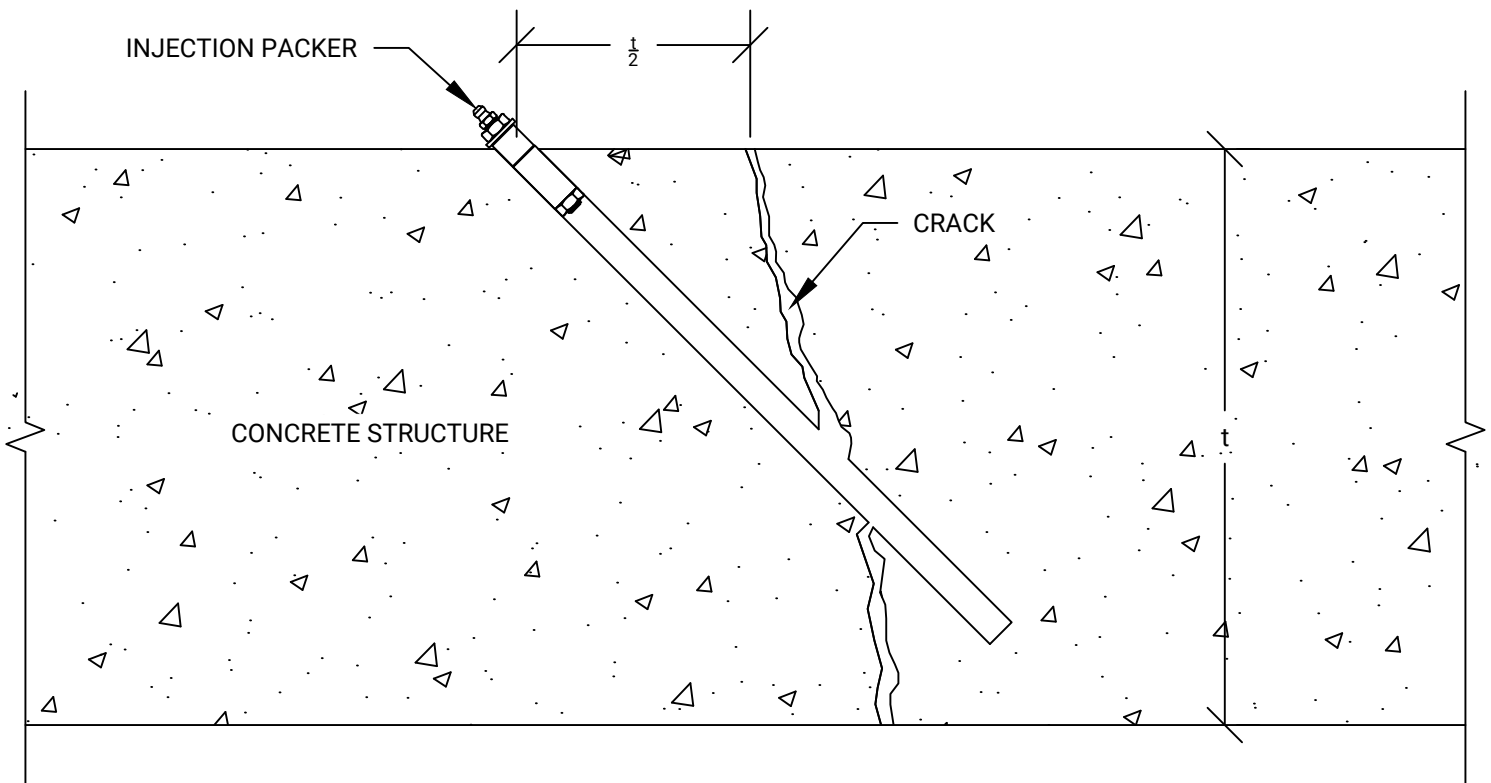

DATE	10/30/2023
DRAWN_BY	D.J.I.
SCALE	N.T.S.
PRODUCT_NUMBER	VARIES

DRAWING_TITLE

STANDARD CRACK INJECTION DETAIL

